

1 Low-Frequency Asymptotic Analysis of Seismic
2 Reflection From a Fluid-Saturated Medium

3 D. B. SILIN^{1,*}, V. A. KORNEEV¹, G. M. GOLOSHUBIN² and T. W.
4 PATZEK³

5 ¹*Lawrence Berkeley National Laboratory, 1 Cyclotron Road, MS 90-1116, Berkeley, CA*
6 *94720, USA*

7 ²*Department of Geosciences, University of Houston, 504 Science and Research Bldg 1*
8 *Houston, TX 77204-5006, USA*

9 ³*University of California, Berkeley, 437 Davis Hall, Berkeley, CA 94720, USA*

10 (Received: 27 April 2004; in final form: 14 January 2005)

11 **Abstract.** Reflection of a seismic wave from a plane interface between two elastic media
12 does not depend on the frequency. If one of the media is poroelastic and fluid-saturated,
13 then the reflection becomes frequency-dependent. This paper presents a low-frequency
14 asymptotic formula for the reflection of seismic plane p-wave from a fluid-saturated
15 porous medium. The obtained asymptotic scaling of the frequency-dependent component
16 of the reflection coefficient shows that it is asymptotically proportional to the square root
17 of the product of the reservoir fluid mobility and the frequency of the signal. The depen-
18 dence of this scaling on the dynamic Darcy's low relaxation time is investigated as well.
19 Derivation of the main equations of the theory of poroelasticity from the dynamic filtra-
20 tion theory reveals that this relaxation time is proportional to Biot's tortuosity parameter.

21 **Key words:** low-frequency signal, Darcy's law, seismic reflection.

22 **1. Introduction**

23 When a seismic wave interacts with a boundary between elastic and
24 fluid-saturated media, some energy of the wave is reflected and the rest
25 is transmitted or dissipated. It is well-known that both the transmis-
26 sion and reflection coefficients from a fluid-saturated porous medium are
27 functions of frequency (Geertsma and Smit, 1961; Dutta and Ode, 1983;
28 Santos *et al.*, 1992; Denneman *et al.*, 2002). Recently, low-frequency sig-
29 nals were successfully used in obtaining high-resolution images of oil and
30 gas reservoirs (Goloshubin and Bakulin, 1998; Goloshubin and Korneev,
31 2000; Castagna *et al.*, 2003) and in monitoring underground gas stor-
32 age (Korneev *et al.*, 2004). Therefore, understanding the behavior of the

*Author for correspondence: e-mail: dsilin@lbl.gov



33 reflection coefficient at the low-frequency end of the seismic spectrum is of
34 special importance.

35 The main objective of this paper is to obtain an asymptotic repre-
36 sentation of the reflection of seismic signal from a fluid-saturated porous
37 medium in the low-frequency domain. More specifically, we derive a sim-
38 ple formula, where the frequency-dependent component of the reflection
39 coefficient is proportional to the square root of the product of frequency
40 of the signal and the mobility of the fluid in the reservoir. This scaling
41 can be different depending on the magnitude of the tortuosity factor. Since
42 the latter is proportional to dynamic Darcy's law relaxation time, it can be
43 evaluated from a flow experiment or using microscopic-scale flow model-
44 ing (Patzek, 2001).

45 We derive wave propagation equations from the basic principles of the
46 theory of filtration. This is done, in particular, to verify that both the fil-
47 tration and poroelasticity theories are based on a common foundation. We
48 retain the equations needed in the asymptotic analysis that follows, skip-
49 ping details where the calculations are similar to those in the classical
50 works by Biot (1956a,b, 1962).

51 Fluid flow in an elastic porous medium is the subject of both fil-
52 tration theory (Muskat, 1937; Polubarinova-Kochina, 1962; Bear, 1972;
53 Barenblatt *et al.*, 1990) and the theory of poroelasticity (Frenkel, 1944;
54 Gassmann, 1951; Biot, 1956a,b, 1962; Wang, 2000). The filtration theory
55 usually assumes steady-state or transient processes where the macroscopic
56 transition times are significantly longer than the transition times of the
57 local microscopic processes. The poroelasticity theory includes a model of
58 acoustic wave propagation in fluid-saturated elastic media, where the mac-
59 roscopic transition times are short and, therefore, the concept of steady-
60 state fluid flow may be inapplicable.

61 To obtain a system of equations characterizing fluid-solid interac-
62 tions in a macroscopically homogeneous elastic fluid-saturated porous
63 medium, we adopt *relaxation filtration* (Alishaev and Mirzadzhanzadeh,
64 1975; Molokovich *et al.*, 1980; Molokovich, 1987), which employs a *relax-*
65 *ation time* to account for the inertial and non-equilibrium effects in fluid
66 flow, thus extending the classical Darcy's law (Darcy, 1856; Hubbert, 1940,
67 1956). Originally, Darcy's law was formulated for steady-state flow (Darcy,
68 1856). It is recognized that non-equilibrium effects are important in two-
69 phase flow (Barenblatt, 1971; Barenblatt and Vinnichenko, 1980), (see
70 also Silin and Patzek, 2004). However, due to local heterogeneities, they are
71 also important in single-phase flow.

72 Further, it is demonstrated in Sections 2 and 3 that under different
73 assumptions, the equations obtained here can be transformed either into
74 Biot's wave equations (Biot, 1956a,b, 1962), or into the elastic pressure

75 diffusion equation (Muskat, 1937; Matthews and Russell, 1967; Barenblatt
76 *et al.*, 1990).

77 In the original Biot's works (1956a,b, 1962), the wave equations of poro-
78 elasticity were derived from the Hamiltonian least-action principle. In order
79 to close the system, an introduction of a parameter having dimension of
80 density was needed. This parameter is related to a dimensionless tortuosity
81 factor characterizing the complexity of the pore space geometry in natural
82 rocks. There are several definitions of tortuosity in the literature, (see e.g.,
83 Bear, 1972). In Biot's derivation, the tortuosity factor statistically charac-
84 terizes the heterogeneity of the local fluid velocity field (Biot, 1962). The
85 way this tortuosity factor and the above-mentioned relaxation time enter
86 the equations leads to the conclusion that they are linearly related to each
87 other. The magnitude of the relaxation time and, hence, the value of the
88 tortuosity, affects the way the reflection coefficient depends on frequency.
89 Since the magnitude of the tortuosity in Biot's equations ranges, in general,
90 between one and infinity (Molotkov, 1999), it is very important to know
91 the tortuosity factors for different types of rock.

92 Over the last fifty years, a significant effort has been spent on the investiga-
93 tions of attenuation of Biot's waves, (see e.g., Pride and Berryman, 2003a,b)
94 and the references therein. It has been noticed that there must be a relation
95 between the dependence of the attenuation on the wave frequency and the
96 permeability of the reservoir (Pride *et al.*, 2003). In many cases, the attenua-
97 tion coefficient can be obtained in an explicit, but quite cumbersome, form.
98 Computation of the reflection coefficient is even more complex because it
99 additionally requires inversion of a matrix. However, for a robust reservoir
100 imaging procedure, a simple asymptotic expression is needed.

101 Low-frequency limit of Biot's theory was studied using homogenization
102 technique (Auriault and Royer, 2002). In that work, the authors conclude
103 that for a variety of media saturated with slightly compressible fluids, the
104 distinction between Biot's (1956a) and Gassman's (1951) theories dimin-
105 ishes as the frequency tends to zero.

106 In this study, we obtain a simple asymptotic expression where the role
107 of the reservoir fluid mobility is transparent. We focus on the simplest case
108 of normal reflection of a p-wave.

109 In addition, we assume that rock grains are practically incompressible,
110 so that all deformations of the rock and the pore space are due to the rear-
111 rangements of the grains. The scaling relationship obtained in Section 6
112 below has been successfully applied for imaging of oil reservoir productiv-
113 ity (Korneev *et al.*, 2004).

114 The layout of the paper is as follows. In Section 2, the main equa-
115 tions of the model are derived from the principles of filtration theory. In
116 Section 3, the obtained relationships are compared with Biot's equations
117 and the pressure diffusion model. In Section 4, we define a dimensionless

118 small parameter for the asymptotic analysis of the known harmonic-wave
 119 solution to the equations of poroelasticity. In Section 5, the boundary con-
 120 ditions for the reflection problem are formulated. An asymptotic expression
 121 for the reflection coefficient with respect to the small parameters introduced
 122 in Section 4 is obtained in Section 6. In Section 7, we elaborate on how the
 123 relaxation time and tortuosity affect the asymptotic analysis.

124 2. Fluid-Solid Skeleton Interaction Equations

125 Consider a homogeneous porous medium M saturated with a viscous
 126 fluid. The grains of the solid skeleton are displaced by an elastic wave.
 127 It is assumed that a plane p-wave is propagating along the x -axis of
 128 a fixed Cartesian coordinate system. Thus, after averaging over a plane
 129 orthogonal to x , the only non-zero component of the displacement is
 130 the x -component, and the mean displacement is one-dimensional. Due to
 131 the skeleton deformation, the grains are rearranged. We assume that the
 132 rearrangement occurs through elastic deformations of the cement bonds
 133 between the grains. Such an assumption is natural in many situations con-
 134 sidered in hydrology and is quite common in the geophysical literature as
 135 well, (see, e.g., Denneman *et al.*, 2002).

136 In general, deformations result in energy dissipation. In this paper, for
 137 simplicity, it is assumed that these energy losses are much smaller than the
 138 losses through viscous friction in the cross-flow of the reservoir fluid. Fur-
 139 ther, we assume that the rock is “clean”, so that the total mass and volume
 140 of the bonds are small relative to those of the grains. Thus, for the bulk
 141 density of the “dry” skeleton ϱ we have

$$142 \quad \varrho = (1 - \phi)\varrho_g, \quad (1)$$

143 where ϱ_g is the density of the grains and ϕ is the porosity. If we neglect the
 144 microscopic rotational motions of the grains, the mean density of momen-
 145 tum of the drained skeleton is given by

$$146 \quad \varrho \frac{\partial u}{\partial t} = (1 - \phi)\varrho_g \frac{\partial u}{\partial t}, \quad (2)$$

147 where u is the mean displacement of the skeleton grains in the x -direction
 148 and t denotes time.

149 The skeleton deformations change the stress field. We consider only
 150 small variations of parameters near a reference configuration, where all
 151 forces are at equilibrium. It is natural to assume that the shear stresses are
 152 uniformly distributed over directions orthogonal to x . In general, even uni-
 153 formly distributed shear stress influences the rearrangement of the skeleton.
 154 However, the assumption of stiff grains and small-volume bonds allows us
 155 to neglect this influence. The x -component, σ_x , of the stress implied by a

156 displacement of the solid skeleton, u , at a constant fluid pressure, that is
 157 similar to effective stress (Terzaghi and Peck, 1948), can be measured by
 158 the elastic forces acting on a unit (bulk) area in a plane orthogonal to x .
 159 Linear elasticity hypothesis suggests that for small displacements, the stress
 160 σ_x and the displacement u are linearly related:

$$161 \quad \sigma_x = \frac{1}{\beta} \frac{\partial u}{\partial x}. \quad (3)$$

162 Here $\beta = 1/K$ is the drained bulk compressibility, or the inverse of the bulk
 163 modulus K . We retain the subscript x in Equation (3) just to emphasize
 164 that here we focus on a one-dimensional case only.

165 The motion of the reservoir fluid can be characterized by the superficial
 166 or Darcy velocity W measured relative to the skeleton. This means, that if
 167 we imagine a small surface element moving along with the local displace-
 168 ment of the grains, then the volumetric fluid flux through this surface is
 169 equal to the projection of W on the unit normal vector to the surface. The
 170 average velocity v_f of the fluid particles relative to the skeleton is related to
 171 the Darcy velocity by equation

$$172 \quad \phi v_f = W. \quad (4)$$

173 The total fluid pressure-related force acting on the solid skeleton is equal
 174 to $-(\partial p / \partial x)$ (Polubarinova-Kochina, 1962; Wang, 2000). A small volume
 175 of the medium, δV , contains $\rho \delta V$ mass of rock material and $\phi \rho_f \delta V$ mass
 176 of fluid. Here ρ_f is the density of the fluid. Hence, the momentum of mov-
 177 ing fluid per unit bulk volume is

$$178 \quad \phi \rho_f \left(\frac{\partial u}{\partial t} + v_f \right) = \phi \rho_f \frac{\partial u}{\partial t} + \rho_f W. \quad (5)$$

179 Thus, the momentum balance per unit bulk volume is

$$180 \quad \rho_b \frac{\partial^2 u}{\partial t^2} + \rho_f \frac{\partial W}{\partial t} = \frac{1}{\beta} \frac{\partial^2 u}{\partial x^2} - \frac{\partial p}{\partial x}, \quad (6)$$

181 where ρ_b is the bulk density of the fluid-saturated medium:

$$182 \quad \rho_b = (1 - \phi) \rho_g + \phi \rho_f = \rho + \phi \rho_f. \quad (7)$$

183 Now, consider the motion of the fluid. According to Darcy's law, at steady-
 184 state conditions

$$185 \quad W = -\rho_f \frac{\kappa}{\eta} \frac{\partial \Phi}{\partial x}, \quad (8)$$

186 where κ is the permeability of the medium, η is the viscosity of the fluid
 187 and Φ is the flow potential (Hubbert, 1940, 1956). We consider only small

188 perturbations near an equilibrium configuration and the Darcy velocity
 189 W is measured relative to the porous medium. Hence, the differential of
 190 potential Φ is amended with a term characterizing additional pressure drop
 191 due to the accelerated motion of the skeleton

$$192 \quad d\Phi = \frac{dp}{\rho_f} + \frac{\partial^2 u}{\partial t^2} dx. \quad (9)$$

193 Darcy's law (8) is for steady-state flow. If flow is transient, for example, due
 194 to abrupt changes in the pressure field, Equation (8) may need to be modi-
 195 fied in order to account for the inertial and relaxation effects. To derive the
 196 respective equation, we use an argument similar to that in Barenblatt and
 197 Vinnichenko (1980). As the pressure gradient changes, the local redistribu-
 198 tion of the pressure field does not occur instantaneously because it includes
 199 microscopic fluid flow along and between the pores. Thus, the gradient of
 200 flow potential determines some combination of Darcy velocity and "Darcy
 201 acceleration"

$$202 \quad \Psi \left(W, \tau \frac{\partial W}{\partial t} \right) = -\rho_f \frac{\kappa}{\eta} \frac{\partial \Phi}{\partial x}. \quad (10)$$

203 Clearly, $\Psi(W, 0) = W$. At low-frequency limit, the acceleration component
 204 is small, hence a linearization with respect to the second parameter yields

$$205 \quad W + \tau \frac{\partial W}{\partial t} = -\rho_f \frac{\kappa}{\eta} \frac{\partial \Phi}{\partial x}. \quad (11)$$

206 Here τ is a characteristic redistribution time.

207 Such a modification of Darcy's law was proposed by Alishaev (1974),
 208 Alishaev and Mirzadzhanzadeh (1975) using different assumptions. In mul-
 209 tiphase flow, similar considerations were used to model non-equilibrium
 210 effects at the front of water-oil displacement and spontaneous imbibition
 211 (Barenblatt, 1971; Barenblatt and Vinnichenko, 1980). Some estimates
 212 of the relaxation time, based on an interpretation of experiments, were
 213 reported in Molokovich *et al.* (1980), Molokovich (1987), and Dinariev and
 214 Nikolaev (1990). Apparently, the relaxation time is a function of the pore
 215 space geometry, fluid viscosity η , and compressibility β_f . Dimensional anal-
 216 ysis then suggests that $\tau = \eta \beta_f F(\kappa/L^2)$, where L is the characteristic size
 217 of an elementary representative volume of the medium, and F is some
 218 dimensionless function. Time τ is apparently related to the tortuosity fac-
 219 tor (Biot, 1962). This relationship is discussed in more detail below.

220 Summing up, we arrive at the following equation characterizing the
 221 dynamics of fluid flow

$$222 \quad W + \tau \frac{\partial W}{\partial t} = -\frac{\kappa}{\eta} \frac{\partial p}{\partial x} - \rho_f \frac{\kappa}{\eta} \frac{\partial^2 u}{\partial t^2}. \quad (12)$$

223 The assumption that both skeleton displacement u and Darcy velocity W
 224 are just small perturbations near some equilibrium values is also applied
 225 to the fluid pressure p . Only these small variations have non-zero deriva-
 226 tives. Therefore, we retain only the terms, which are linear with respect to
 227 small perturbations. A system of momentum balance equations accounting
 228 for convective momentum transport in terms of microscopic fluid velocities
 229 is presented in Nikolaevskii (1996). In Equations (6) and (12), Darcy veloc-
 230 ity is used in conjunction with dynamic version of Darcy's law.

231 The mass balances for the fluid and the solid skeleton are

$$232 \quad \frac{\partial(\varrho_f \phi)}{\partial t} = - \frac{\partial \left(\varrho_f W + \phi \varrho_f \frac{\partial u}{\partial t} \right)}{\partial x}, \quad (13)$$

$$233 \quad \frac{\partial \varrho}{\partial t} = - \frac{\partial}{\partial x} \left(\varrho \frac{\partial u}{\partial t} \right). \quad (14)$$

234 For the fluid, we apply the isothermal compressibility law (Landau and
 235 Lifschitz, 1959), that is, for small fluid pressure perturbation

$$236 \quad \frac{d\varrho_f}{\varrho_f} = \beta_f dp. \quad (15)$$

237 Hence, Equation (13) can be rewritten as

$$238 \quad \frac{\partial \phi}{\partial t} + \phi \beta_f \frac{\partial p}{\partial t} = - \frac{\partial W}{\partial x} - \phi \frac{\partial^2 u}{\partial x \partial t} - W \frac{\partial \varrho_f}{\partial x} - \frac{1}{\varrho_f} \frac{\partial}{\partial x} (\phi \varrho_f) \frac{\partial u}{\partial t}. \quad (16)$$

239 Since the parameter variations are small, and only the perturbed compo-
 240 nents have non-zero derivatives, the last two terms in Equation (16) are of
 241 higher order and can be neglected.

242 With $\rho = (1 - \phi)\rho_g$, Equation (14) takes on the form

$$243 \quad - \frac{\partial \phi}{\partial t} + (1 - \phi) \frac{1}{\varrho_g} \frac{\partial \varrho_g}{\partial t} = - \frac{1}{\varrho_g} (1 - \phi) \frac{\partial \varrho_g}{\partial x} \frac{\partial u}{\partial t} + \frac{\partial \phi}{\partial x} \frac{\partial u}{\partial t} - (1 - \phi) \frac{\partial^2 u}{\partial x \partial t}. \quad (17)$$

244 The smallness of perturbations implies that the first two terms on the right-
 245 hand side of the last equation can be dropped. Further on, the perturba-
 246 tion of grain density is a linear function of the perturbations of stress and
 247 fluid pressure, that is

$$248 \quad \frac{1}{\varrho_g} d\varrho_g = \beta_{gs} d\sigma_x + \beta_{gf} dp, \quad (18)$$

249 where β_{gs} and β_{gf} are the respective compressibility coefficients. Thus,
 250 Equation (17) can be written as

$$251 \quad \frac{\partial \phi}{\partial t} = (1 - \phi) \beta_{gf} \frac{\partial p}{\partial t} + (1 - \phi) \left(1 + \frac{\beta_{gs}}{\beta} \right) \frac{\partial^2 u}{\partial x \partial t}. \quad (19)$$

252 A combination of this last result with Equation (16) leads to the following
253 relationship

$$254 \quad \left(1 + (1 - \phi) \frac{\beta_{gs}}{\beta}\right) \frac{\partial^2 u}{\partial x \partial t} + (\phi \beta_f + (1 - \phi) \beta_{gf}) \frac{\partial p}{\partial t} = - \frac{\partial W}{\partial x}. \quad (20)$$

255 The compressibility is much smaller than the compressibility of the fluid or
256 the skeleton:

$$257 \quad \beta_{gf} \ll \beta_f \quad \text{and} \quad \beta_{gs} \ll \beta. \quad (21)$$

258 This means that bulk deformation occurs only through the porosity pertur-
259 bations. Thus, Equation (20) can be further reduced to

$$260 \quad \frac{\partial^2 u}{\partial x \partial t} + \phi \beta_f \frac{\partial p}{\partial t} = - \frac{\partial W}{\partial x}. \quad (22)$$

261 Equation (22) states that the amount of fluid volume packed into a unit
262 bulk volume per unit time is equal to minus the divergence of the absolute
263 fluid velocity. This fluid redistribution occurs due to fluid compression and
264 porosity variation. Note that Equations (20) and (22) are mathematically
265 similar. Below, we use the more general mass balance equation (20) unless
266 it exceedingly complicates the calculations.

267 To summarize, we have obtained a closed system of three Equations (6),
268 (12), and (20) with three unknown functions of t and x : the skeleton dis-
269 placement u , the fluid pressure p , and the Darcy velocity W .

270 3. Relationship to Biot's Poroelasticity and Pressure Diffusion Equations

271 In this section, we demonstrate that under the assumptions formulated
272 in Section 2 Equations (6), (12), and (20) can be reduced to the system
273 of equations obtained by Biot (1956a, 1962), (see also Dutta and Ode,
274 1979). At the same time, neglecting the inertial terms in these equations,
275 leads to the pressure diffusion equation used in hydrology and petroleum
276 engineering for well test analysis, (see Theis, 1935; Jacob, 1940) or books
277 (Matthews and Russell, 1967; Barenblatt *et al.*, 1990).

278 To recover Biot's poroelasticity equations, the assumption of grain
279 incompressibility, Equations (21), is applied. For small oscillatory deforma-
280 tions of the skeleton and fluctuations of the fluid flow, a "superficial" dis-
281 placement w of the fluid relative to the skeleton can be introduced, so that

$$282 \quad W = \frac{\partial w}{\partial t}. \quad (23)$$

283 Note that inasmuch as w is related by Equation (23) to the Darcy velocity
284 of the fluid, it is different from the average microscopic fluid displacement.
Substitution of (23) into Equation (22) yields

$$285 \quad \frac{\partial^2 u}{\partial x \partial t} + \phi \beta_f \frac{\partial p}{\partial t} = - \frac{\partial^2 w}{\partial t \partial x}. \quad (24)$$

286 By integration in t and differentiation in x , we obtain

$$287 \quad \frac{\partial p}{\partial x} = - \frac{1}{\phi \beta_f} \frac{\partial^2 u}{\partial x^2} - \frac{1}{\phi \beta_f} \frac{\partial^2 w}{\partial x^2}. \quad (25)$$

288 In this derivation, we have used the assumption of the smallness of the
289 rock–fluid system oscillations near an equilibrium configuration. Otherwise,
290 due to the integration, Equation (25) should include an unknown function
291 of x . Substitution of Equation (23) and the result (25) in Equations (6) and
292 (12) yields:

$$293 \quad \varrho_b \frac{\partial^2 u}{\partial t^2} + \varrho_f \frac{\partial^2 w}{\partial t^2} = \left(\frac{1}{\beta} + \frac{1}{\phi \beta_f} \right) \frac{\partial^2 u}{\partial x^2} + \frac{1}{\phi \beta_f} \frac{\partial^2 w}{\partial x^2}, \quad (26)$$

$$294 \quad \varrho_f \frac{\partial^2 u}{\partial t^2} + \tau \frac{\eta}{\kappa} \frac{\partial^2 w}{\partial t^2} = \frac{1}{\phi \beta_f} \frac{\partial^2 u}{\partial x^2} + \frac{1}{\phi \beta_f} \frac{\partial^2 w}{\partial x^2} - \frac{\eta}{\kappa} \frac{\partial w}{\partial t}. \quad (27)$$

295 Under the assumptions formulated above, Equations (26) and (27) are
296 equivalent to the Biot system of equations (8.34) (Biot, 1962):

$$297 \quad \frac{\partial^2}{\partial t^2} (\varrho_b u + \varrho_f w) = \frac{\partial}{\partial x} \left(A_{11} \frac{\partial u}{\partial x} + M_{11} \frac{\partial w}{\partial x} \right),$$

$$298 \quad \frac{\partial^2}{\partial t^2} (\varrho_f u + m w) = \frac{\partial}{\partial x} \left(M_{11} \frac{\partial u}{\partial x} + M \frac{\partial w}{\partial x} \right) - \frac{\eta}{\kappa} \frac{\partial w}{\partial t}.$$

299 Comparing the individual terms, we can establish a relationship between
300 the relaxation time and the tortuosity factor. Namely, the relaxation time
301 τ is related to the dynamic coupling coefficient m (Biot, 1962) through
302 the inverse mobility ratio η/κ . The dynamic coupling coefficient is often
303 expressed through the tortuosity factor T : $m = T \varrho_f / \phi$. Hence, for the tor-
304 tuosity and relaxation time, we obtain the following relationship:

$$305 \quad T = \tau \frac{\eta \phi}{\kappa \varrho_f} \quad \text{or} \quad \tau = T \frac{\kappa \varrho_f}{\eta \phi}. \quad (28)$$

306 Comparison of the elastic coefficients reveals that under the assumption of
307 isotropic porous medium and incompressible grains (the Biot–Willis coeffi-
308 cient $\alpha = K/H \approx 1$, and $K_u = K + K_f/\phi$), the Biot coefficients are constant
309 and equal to

$$310 \quad A_{11} = K_u \approx \frac{1}{\beta} + \frac{1}{\phi \beta_f} \quad \text{and} \quad M_{11} = M = K_u B \approx \frac{1}{\phi \beta_f}, \quad (29)$$

311 where K_u is the undrained bulk modulus, and $B = R/H$ is Skempton's
312 coefficient, $1/H$ being the poroelastic expansion coefficient, and $1/R$ the
313 unconstrained specific storage coefficient.

314 For derivation of the pressure diffusion equation, we assume that the
 315 characteristic time t_D of the process is large in comparison with the relax-
 316 ation time τ and the displacements of the skeleton are much smaller than
 317 the characteristic length scale of the process L :

$$318 \quad t_D \gg \tau \quad \text{and} \quad u \ll L. \quad (30)$$

319 Under this assumption, the second-order time derivatives of displacement
 320 u and time derivatives of Darcy velocity W in Equations (6) and (12) can
 321 be dropped:

$$322 \quad \frac{\partial p}{\partial x} = \frac{1}{\beta} \frac{\partial^2 u}{\partial x^2}, \quad (31)$$

$$323 \quad W = -\frac{\kappa}{\eta} \frac{\partial p}{\partial x}. \quad (32)$$

324 By integrating Equation (31) in x and differentiating in t , we obtain

$$325 \quad \frac{\partial^2 u}{\partial t \partial x} = \beta \frac{\partial p}{\partial t}. \quad (33)$$

326 Formally, the integration with respect to x is defined up to a function of
 327 time, which is constant due to the constant pressure boundary condition at
 328 infinity. This constant is later cancelled by the differentiation with respect
 329 to t . Finally, by a substitution of Equations (32) and (33) into (22), we
 330 obtain

$$331 \quad \phi \left(\frac{\beta}{\phi + \beta_f} \right) \frac{\partial p}{\partial t} = \frac{\kappa}{\eta} \frac{\partial^2 p}{\partial x^2}. \quad (34)$$

332 This last equation is the pressure diffusion equation routinely used in well
 333 test analysis (Matthews and Russell, 1967; Barenblatt *et al.*, 1990).

334 **4. Plane Compressional Wave: An Asymptotic Solution**

335 In this Section, we obtain the low-frequency asymptotic expressions for
 336 p-waves in fluid-saturated poroelastic media. These results are used in Sec-
 337 tion 6 in asymptotic analysis of the reflection coefficient.

338 To transform the system of Equations (6), (12), and (20) obtained in
 339 Section 2, we introduce the dimensionless pressure

$$340 \quad P = \phi \beta_f p \quad (35)$$

and the hydraulic diffusivity

$$341 \quad D = \frac{\kappa}{\phi\beta_f\eta}. \quad (36)$$

342 Dividing Equation 6 by ϱ_b and putting

$$343 \quad v_b^2 = \frac{1}{\beta\varrho_b} \quad \text{and} \quad v_f^2 = \frac{1}{\phi\beta_f\varrho_b}, \quad (37)$$

344 we obtain

$$345 \quad \frac{\partial^2 u}{\partial t^2} + \frac{\varrho_f}{\varrho_f} \frac{\partial W}{\partial t} = v_b^2 \frac{\partial^2 u}{\partial x^2} - v_f^2 \frac{\partial P}{\partial x}, \quad (38)$$

$$346 \quad \lambda_f \frac{\partial^2 u}{\partial t^2} + W + \tau \frac{\partial W}{\partial t} = -D \frac{\partial P}{\partial x}, \quad (39)$$

$$347 \quad \gamma_1 \frac{\partial^2 u}{\partial x \partial t} + \gamma_2 \frac{\partial P}{\partial t} = -\frac{\partial W}{\partial x}, \quad (40)$$

348 where

$$349 \quad \lambda_f = \varrho_f \frac{\kappa}{\eta} \quad (41)$$

350 is the “kinematic” mobility of the fluid, and

$$351 \quad \gamma_1 = 1 + (1 - \phi) \frac{\beta_{gs}}{\beta} \quad \text{and} \quad \gamma_2 = 1 + (1 - \phi) \frac{\beta_{gf}}{\phi\beta_f}. \quad (42)$$

352 Coefficient λ_f has the dimension of time. Assumptions 22 imply that both
 353 dimensionless coefficients γ_1 and γ_2 are close to one. The system of Equa-
 354 tions (38)–(40) is similar to Biot’s system, however it uses fluid pressure and
 355 Darcy velocity, that are more typical of filtration theory. System (38)–(40)
 356 admits a solution, which is the sum of slow and fast waves (Biot, 1956a).
 357 Asymptotic analysis of these waves is our next goal.

358 A plane-wave solution to Equations (38)–(40) has the form

$$359 \quad u = U_s e^{i(\omega t - kx)}, \quad W = W_f e^{i(\omega t - kx)}, \quad P = P_0 e^{i(\omega t - kx)}. \quad (43)$$

360 Substitution of Equation (43) into (38)–(40) and some algebra yield

$$361 \quad W_f = -i\omega\gamma_1 U_s + \omega\gamma_2 \frac{P_0}{k} \quad (44)$$

362 or

$$363 \quad W_f = i\omega(-\gamma_1 + \gamma_2\xi)U_s = v \left(-\frac{\gamma_1}{\xi} + \gamma_2 \right) P_0, \quad (45)$$

364 where

$$365 \quad v = \frac{\omega}{k} \quad \text{and} \quad \xi = -\frac{iP_0}{kU_s} \quad (46)$$

366 Denote

$$367 \quad \tau_D = \frac{D}{v_f^2} = \frac{\kappa \varrho_b}{\eta}, \quad \gamma_v = \frac{v_b^2}{v_f^2} = \frac{\phi \beta_f}{\beta} \quad \text{and} \quad \gamma_e = \frac{\varrho_f}{\varrho_b} \quad (47)$$

368 The parameters γ_v and γ_e are dimensionless. Taking into account Equa-
369 tion 41

$$370 \quad \lambda_f = \gamma_e \tau_D. \quad (48)$$

371 The dimensionless relaxation time θ and dimensionless angular frequency
372 ε are defined as

$$373 \quad \theta = \frac{\tau}{\tau_D} \quad \text{and} \quad \varepsilon = \tau_D \omega. \quad (49)$$

374 Using these definitions, we obtain the following quadratic equation with
375 respect to ξ :

$$376 \quad (\gamma_2 + i\varepsilon(-\gamma_2\gamma_e + \theta\gamma_2))\xi^2 + (-\gamma_1 + \gamma_2\gamma_v + i\varepsilon[-1 + \gamma_1\gamma_e + (\gamma_e - \theta\gamma_1) + \theta\gamma_2\gamma_v])\xi + \\ 377 \quad + (-\gamma_1\gamma_v + i\varepsilon\gamma_v(\gamma_e - \tau\gamma_1)) = 0. \quad (50)$$

378 If we assume the permeability $\kappa \sim 1$ Darcy, that is $\kappa \sim 10^{-12}$ m², the vis-
379 cosity of the fluid $\eta \sim 1$ cP = 10^{-3} Pa-s, and the bulk density of the rock
380 $\varrho_b \sim 10^3$ kg/m³, then $\tau_D \sim 10^{-6}$ and $\varepsilon \leq 10^{-3}$ for frequencies ω not exceed-
381 ing ~ 1 kHz. Since γ_1 and γ_2 are of the order of unity, ε (more accurately,
382 $i\varepsilon$) is a small parameter in Equation (50). At $\varepsilon = 0$, there are two *real* roots

$$383 \quad \xi_0^{(1)} = \frac{\gamma_1}{\gamma_2} \quad \text{and} \quad \xi_0^{(2)} = -\gamma_v. \quad (51)$$

384 By virtue of Equations (21) and (42), the absolute value of the first root
385 $\xi_0^{(1)}$ is close to unity, whereas the absolute value of the second one is equal
386 to $\phi\beta_f/\beta$, that is usually larger than one. We obtain two real asymptotic
387 values for the complex velocity v

$$388 \quad v_0^{(1)} = 0 \quad \text{and} \quad v_0^{(2)} = v_f \sqrt{\gamma_v + \frac{\gamma_1}{\gamma_2}}. \quad (52)$$

389 The first solution corresponds to the slow wave, whereas the second one is
390 related to the fast wave.

391 The exact solution to Equation (50) is cumbersome and nontransparent.
392 Therefore, we obtain an asymptotic solution directly from Equation (50) in
393 the form

$$394 \quad \xi = \xi_0 + \xi_1 i\varepsilon - \xi_2 \varepsilon^2 \dots \quad (53)$$

395 Using the notations

$$\begin{aligned} A_0 &= \gamma_2 & A_1 &= -\gamma_2\gamma_e + \theta\gamma_2, \\ B_0 &= \gamma_2\gamma_v - \gamma_1 & B_1 &= -1 + \gamma_e(1 + \gamma_1) + \theta(\gamma_2\gamma_v - \gamma_1), \end{aligned} \quad (54)$$

396 $C_0 = -\gamma_1\gamma_v \quad C_1 = \gamma_v(\gamma_e - \theta\gamma_1),$

397 we obtain

398
$$\xi_1 = -\frac{A_1\xi_0^2 + B_1\xi_0 + C_1}{2A_0\xi_0 + B_0}. \quad (55)$$

399 Thus, the solutions corresponding to the slow and fast waves have, respec-
400 tively, the following forms

401
$$\xi_1^{(1)} = \gamma_v \frac{1 - \gamma_e(\gamma_2\gamma_v + \gamma_1)}{\gamma_1 + \gamma_2\gamma_v} \quad (56)$$

402 and

403
$$\xi_1^{(2)} = \frac{1}{\gamma_2} \frac{\gamma_1 - \gamma_e(\gamma_2\gamma_v + \gamma_1)}{\gamma_1 + \gamma_2\gamma_v}. \quad (57)$$

404 Note, that since both $\gamma_1 \approx 1$ and $\gamma_2 \approx 1$, Equations (56) and (57) can be sim-
405 plified

406
$$\xi_1^{(1)} = \gamma_v \frac{1 - \gamma_e\gamma_v - \gamma_e}{1 + \gamma_v}, \quad (58)$$

407
$$\xi_1^{(2)} = \frac{1}{\gamma_2} \frac{\gamma_1 - \gamma_e\gamma_v - \gamma_e}{1 + \gamma_v}. \quad (59)$$

408 In particular, $\xi_1^{(1)}$ and $\xi_1^{(2)}$ are independent of the permeability of the for-
409 mation and the viscosity of the fluid. Note that the relaxation time also
410 disappears from the first-order approximation of ξ for both the slow and
411 fast wave. The latter circumstance is discussed in Section 7 below.

412 We further obtain that

413
$$v^{(1)} = \pm v_b \sqrt{\frac{i\varepsilon}{\gamma_1 + \gamma_2\gamma_v}} + \dots \quad (60)$$

414 and

415
$$v^{(2)} = \pm v_f \sqrt{\gamma_v + \frac{\gamma_1}{\gamma_2}} + v_f V_1 i\varepsilon + \dots, \quad (61)$$

416 where V_1 is the first coefficient of the expansion of V in the powers of $i\varepsilon$.
 417 The last two equations, in a combination with equation (56), imply that

$$418 \quad k^{(1)} = \pm \frac{1}{\tau_D v_b} \sqrt{\gamma_1 + \gamma_2 \gamma_v} \sqrt{-i\varepsilon} + \dots, \quad (62)$$

$$419 \quad k^{(2)} = \pm \frac{1}{\tau_D v_f} \frac{1}{\sqrt{\gamma_v + \frac{\gamma_1}{\gamma_2}}} \varepsilon + \dots \quad (63)$$

420 The imaginary part of k must be negative. Therefore, from (62), we infer
 421 that

$$422 \quad k^{(1)} = \frac{1}{\tau_D v_b} \sqrt{\gamma_1 + \gamma_2 \gamma_v} \frac{1-i}{\sqrt{2}} \sqrt{\varepsilon} + \dots \quad (64)$$

423 and, respectively,

$$424 \quad v^{(1)} = v_b \sqrt{\frac{1}{\gamma_1 + \gamma_2 \gamma_v}} \frac{1+i}{\sqrt{2}} \sqrt{\varepsilon} + \dots \quad (65)$$

425 By virtue of Equations (51) and (45)

$$426 \quad W_f = -i\omega(\gamma_1 - \gamma_2 \xi) U_s. \quad (66)$$

427 Furthermore, using Equations (53), we get for the fast wave

$$428 \quad W_f^{\text{fast}} = -\varepsilon \omega \gamma_2 \xi_1^{(2)} U_s^{\text{fast}} + \dots \quad (67)$$

429 The right-hand side of the last equation is first-order small with respect
 430 to ε . In other words, at low-frequencies, the fast wave is almost a coher-
 431 ent oscillation of the skeleton and the fluid. At the same time, for the slow
 432 wave, the Darcy velocity amplitude is comparable with the amplitude of the
 433 time-derivative of the displacement

$$434 \quad W_f^{\text{slow}} = -i\omega(\gamma_1 + \gamma_2 \gamma_v) U_s^{\text{slow}} + \dots \quad (68)$$

435 **5. Reflection: Boundary Conditions**

436 Consider a normal incidence of a compressional elastic wave upon a plane
 437 interface $x = 0$ separating media M_1 and M_2 occupying half-spaces $x < 0$
 438 and $x > 0$, respectively, see Figure 1. Medium M_1 is ideal elastic solid,
 whereas medium M_2 is poroelastic fluid-saturated medium. The elastic

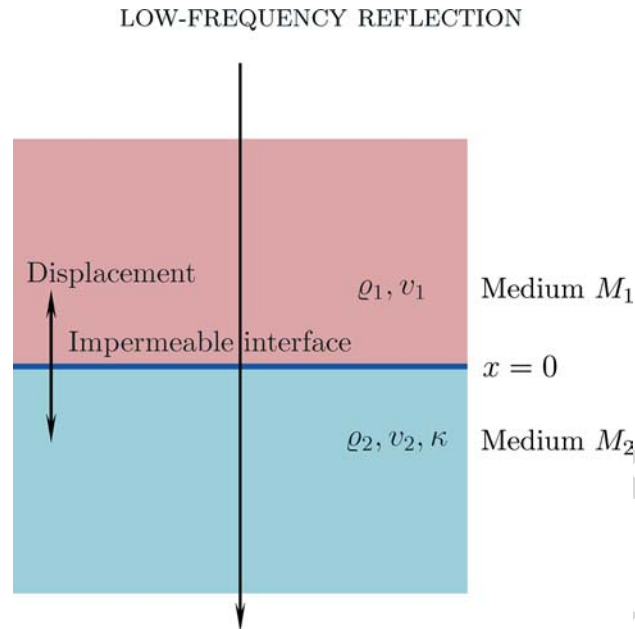


Figure 1. One-dimensional propagation of a low-frequency disturbance perpendicular to the impermeable interface between medium M_1 and porous, permeable solid M_2 fully saturated with a liquid.

439 properties of M_1 and solid skeleton of M_2 are characterized by the bulk
 440 densities ρ_i and the speeds of sound v_i , $i = 1, 2$. We assume that the
 441 permeability of medium M_2 is κ and the boundary between the media is
 442 impermeable to fluid flow. To calculate the reflection coefficient, boundary
 443 conditions at the interface between the media, i.e., at $x=0$, must be formu-
 444 lated.

445 Under the assumptions of Section 3, and neglecting the heterogeneities
 446 of the materials, we can assume that the displacements of the solid parti-
 447 cles composing the media are parallel to x , and so is the flux of the fluid in
 448 the pore space. There is an important difference between the fluid and solid
 449 motion. The solid particles move more or less coherently near the respec-
 450 tive equilibrium positions, whereas fluid particles move in a much more dis-
 451 persed manner caused by the complexity of the pore space geometry. Only
 452 the mean volumetric flux or Darcy velocity of the moving fluid is parallel
 453 to x . This quantity is the result of averaging the microscopic fluid velocity
 454 field over a representative volume. In the case under consideration, such an
 455 averaging can be performed over a plane $x = \text{Const.} > 0$.

456 Denote by u_1 and u_2 the displacements of the solid particles in media
 457 M_1 and M_2 , respectively.

458 First, the continuity of the displacements and microscopic stresses
459 requires that

$$460 \quad u_1|_{x=0} = u_2|_{x=0}, \quad (69)$$

$$461 \quad -\frac{1}{\beta_1} \frac{\partial u_1}{\partial x} \Big|_{x=0} = -\frac{1}{\beta_2} \frac{\partial u_2}{\partial x} \Big|_{x=0} + \phi p|_{x=0}. \quad (70)$$

462 Here we use the fact that the area of the contact between medium M_1 and
463 the fluid saturating medium M_2 is a part of the total area proportional to
464 the porosity of medium M_2 .

465 Zero fluid flux through the boundary implies

$$466 \quad W_f|_{x=0} = 0. \quad (71)$$

467 Boundary conditions (69)–(71) will be used in the next section for investi-
468 gation of the reflection coefficient.

469 6. Reflection Coefficient

470 To calculate the reflection coefficient, we substitute in boundary condi-
471 tions (69)–(71) the sum of incident and reflected displacements in medium
472 M_1

$$473 \quad u_1 = U_1 e^{i(\omega t - k_1 x)} + R U_1 e^{i(\omega t + k_1 x)} \quad (72)$$

474 and the sum of slow and fast waves transmitted into medium M_2 expressed
475 in terms of the fluid pressure and Darcy velocity variations

$$476 \quad p = \frac{1}{\phi \beta_f} P_0^s e^{i(\omega t - k_s x)} + \frac{1}{\phi \beta_f} P_0^f e^{i(\omega t - k_f x)}, \quad (73)$$

$$477 \quad u_2 = U_2^s e^{i(\omega t - k_s x)} + U_2^f e^{i(\omega t - k_f x)}. \quad (74)$$

478 Utilizing the first Equation (45), we obtain

$$\begin{aligned}
 (1 + R)U_1 &= U_2^s + U_2^f, \\
 \frac{ik_1}{\beta_1}(1 - R)U_1 &= \frac{ik_2^s}{\beta_2}U_2^s + \frac{ik_2^f}{\beta_2}U_2^f \\
 &+ \frac{P_0^f + P_0^s}{\beta_f} \\
 479 \quad 0 &= i\omega(-\gamma_1 + \gamma_2 \xi^s)U_2^s + i\omega(-\gamma_1 + \gamma_2 \xi^f)U_2^f.
 \end{aligned} \quad (75)$$

480 Further, by virtue of Equation 46, we get

$$\begin{aligned}
 & -(1+R)U_1 + U_2^s + U_2^f = 0, \\
 & -\frac{k_1}{\beta_1}(1-R)U_1 + k_2^s \left(\frac{1}{\beta_2} + \frac{\xi^s}{\beta_f} \right) U_2^s + k_2^f \left(\frac{1}{\beta_2} + \frac{\xi^f}{\beta_f} \right) U_2^f = 0, \quad (76) \\
 & (\gamma_1 - \gamma_2 \xi^s) U_2^s + (\gamma_1 - \gamma_2 \xi^f) U_2^f = 0.
 \end{aligned}$$

481

482 We assume zero attenuation in medium M_1 , therefore $k_1 > 0$ is real and
 483 $\omega k_1 = v_1$ is the p-wave velocity in this medium. Note that v_1 is a charac-
 484 teristic of the medium M_1 , which does not depend on the frequency.

485 Dividing through by U_1 and putting $Z_1 = R$, $Z_2 = U_2^s/U_1$, and $Z_3 = U_2^f/U_1$,
 486 we obtain the following system of equations

$$\begin{aligned}
 & -Z_1 + Z_2 + Z_3 = 1, \\
 & \omega Z_1 + v_1 k_2^s \left(\frac{\beta_1}{\beta_2} + \xi^s \frac{\beta_1}{\beta_f} \right) Z_2 + v_1 k_2^f \left(\frac{\beta_1}{\beta_2} + \xi^f \frac{\beta_1}{\beta_f} \right) Z_3 = \omega, \quad (77) \\
 & (\gamma_1 - \gamma_2 \xi^s) Z_2 + (\gamma_1 - \gamma_2 \xi^f) Z_3 = 0.
 \end{aligned}$$

487

488 Hence, using Equations (63) and (62) and notation (49), the system of
 489 equations (77) can be presented in the following asymptotic form

$$\begin{aligned}
 & -Z_1 + Z_2 + Z_3 = 1, \\
 & \sqrt{\varepsilon} Z_1 + A_{22} Z_2 + A_{23} \sqrt{\varepsilon} Z_3 = \sqrt{\varepsilon}, \quad (78) \\
 & (A_{32}^{(1)} + A_{32}^{(2)} i \varepsilon) Z_2 + A_{33} i \varepsilon Z_3 = 0.
 \end{aligned}$$

490

491 The expressions for the coefficients A_{ij} can be obtained from the asymp-
 492 totic formulae (53), (56), (57), (63), and (64):

$$A_{22} = \frac{v_1}{v_b} \sqrt{\gamma_1 + \gamma_2 \gamma_v} \gamma_s \frac{1-i}{\sqrt{2}}, \quad (79)$$

493

$$A_{23} = \frac{v_1}{v_f} \sqrt{\frac{\gamma_2}{\gamma_1 + \gamma_2 \gamma_v}} \gamma_f, \quad (80)$$

494

$$A_{32}^{(1)} = \gamma_1 + \gamma_2 \gamma_v, \quad (81)$$

495

$$A_{32}^{(2)} = -\gamma_2 \gamma_v \frac{1 - \gamma_e (\gamma_2 \gamma_v + \gamma_1)}{\gamma_1 + \gamma_2 \gamma_v}, \quad (82)$$

496

$$A_{33} = -\frac{\gamma_e \gamma_1 - \gamma_1 + \gamma_e}{\gamma_1 + \gamma_2 \gamma_v}. \quad (83)$$

497

498 Here we used the notations

$$\gamma_s = \beta_1 \left(\frac{1}{\beta_2} - \gamma_v \frac{1}{\beta_f} \right) \quad \text{and} \quad \gamma_f = \beta_1 \left(\frac{1}{\beta_2} + \frac{\gamma_1}{\gamma_2} \frac{1}{\beta_f} \right). \quad (84)$$

499

500 From the last Equation (78)

$$501 \quad Z_2 = -\frac{A_{33}}{A_{32}^{(1)}} i \varepsilon Z_3 + \dots \quad (85)$$

502 This means that at low frequencies (i.e., at $\varepsilon \rightarrow 0$), the slow wave displace-
503 ment is scaled with the velocity of fast displacement and, therefore, is one
504 order of magnitude smaller. In other words, the slow part of the signal
505 practically does not propagate and is mostly responsible for the reflection.

506 Substitution of (85) into the first two Equations (78) yields

$$507 \quad \begin{aligned} -Z_1 + \left(1 - \frac{A_{33}}{A_{32}^{(1)}} i \varepsilon\right) Z_3 &= 1, \\ \sqrt{\varepsilon} Z_1 + \left(A_{23} \sqrt{\varepsilon} - A_{22} \frac{A_{33}}{A_{32}^{(1)}} i \varepsilon\right) Z_3 &= \sqrt{\varepsilon}. \end{aligned} \quad (86)$$

508 Cancelling the $\sqrt{\varepsilon}$ in the second Equation (86) and dropping terms of the
509 order higher than $\sqrt{\varepsilon}$, we obtain that

$$510 \quad Z_3 = Z_1 + 1. \quad (87)$$

511 Consequently

$$512 \quad Z_1 = \frac{1 - A_{23} + A_{22}(A_{33}/A_{32}^{(1)})i\sqrt{\varepsilon}}{1 + A_{23} - A_{22}(A_{33}/A_{32}^{(1)})i\sqrt{\varepsilon}}. \quad (88)$$

513 Again, retaining only the terms of the order $\sqrt{\varepsilon}$, we finally obtain

$$514 \quad Z_1 = \frac{1 - A_{23}}{1 + A_{23}} + \sqrt{2} \frac{\tilde{A}_{22} A_{33}}{A_{32}^{(1)}} \frac{1}{(1 + A_{23})^2} (1 + i) \sqrt{\varepsilon}, \quad (89)$$

515 where

$$516 \quad \tilde{A}_{22} = \frac{v_1}{v_b} \sqrt{\gamma_1 + \gamma_2 \gamma_v \gamma_s}. \quad (90)$$

517 Analysis of the expression (80) shows that in practical situations the
518 coefficient A_{23} is greater than one. Therefore, the frequency-independent
519 component of the reflection coefficient is negative. The frequency-depen-
520 dent component of the reflection has the same sign as \tilde{A}_{33} . The latter is
521 positive if and only if

$$522 \quad \gamma_e < \frac{\gamma_1}{1 + \gamma_1}. \quad (91)$$

523 The right-hand side of the last inequality is approximately equal to 0.5.
524 Hence, roughly speaking, \tilde{A}_{33} is positive when the fluid density is at least

525 twice less than the bulk density of the saturated medium. In such a case the
 526 maximum of the absolute value of the reflection coefficient is attained at
 527 $\varepsilon=0$. At the same time, for dense fluids, the first-order term of the asymp-
 528 totic expansion, which is proportional to the square root of ε , may vanish
 529 and the first frequency-dependent term will be linear. In this case, the tor-
 530 tuosity coefficient becomes an important factor.

531 In the original variables 47, Equation (89) takes on the form

$$532 \quad R = \frac{1 - A_{23}}{1 + A_{23}} + \sqrt{2} \frac{\tilde{A}_{22} A_{33}}{A_{32}^{(1)}} \frac{1}{(1 + A_{23})^2} (1 + i) \sqrt{\frac{\kappa \varrho_b}{\eta}} \omega. \quad (92)$$

533 Note that the last equation relates the reflectivity to the frequency through
 534 the factor of $\tau_D = \kappa \varrho_b / \eta$ having the dimension of time. It involves a prop-
 535 erty of the rock, the permeability coefficient, a property of the fluid, the
 536 viscosity, and a property of the coupled fluid-rock system, the bulk den-
 537 sity. The frequency scaling proposed here is similar to but not the same as
 538 the scaling introduced in Geertsma and Smit (1961).

539 7. The Role of Relaxation Time and Tortuosity

540 The asymptotic calculations presented above show that the dimensionless
 541 parameter θ , related to both relaxation time and tortuosity factor, disap-
 542 pears from the first-order terms. However, if θ is large, then some expan-
 543 sions obtained in Sections 4 and 6 must be reviewed. Practically, the range
 544 of frequencies is limited by the specifications of the available tools. There-
 545 fore, it may happen that within the range of frequencies available for anal-
 546 ysis the product $\theta \varepsilon$ is not negligibly small, and the passage to the limit as
 547 $\varepsilon \rightarrow 0$ should be replaced with analysis at some intermediate finite values
 548 of ε . In such a case, the asymptotic analysis must be performed differently.
 549 In this section, we consider two examples of such analysis.

550 First, let us assume that within the range of available frequencies, the
 551 parameter $\varepsilon \theta$ is of the order of one. In the original variables, this condi-
 552 tion is equivalent to

$$553 \quad \omega \sim \frac{1}{\tau}. \quad (93)$$

554 Regrouping the coefficients in the Equation (50) and dividing through by
 555 $1 + i\theta \varepsilon$, we obtain

$$556 \quad (A_0 + A_1^\theta i \varepsilon) \xi^2 + (B_0 + B_1^\theta i \varepsilon) \xi + C_0 + C_1^\theta i \varepsilon = 0, \quad (94)$$

557 where the coefficients with zero indices are the same as those in Equation
558 (54), and

$$\begin{aligned}
 A_1^\theta &= -\frac{\gamma_2 \gamma_\ell}{1 + i\theta\varepsilon}, \\
 B_1^\theta &= \frac{-1 + \gamma_\ell(1 + \gamma_1)}{1 + i\theta\varepsilon}, \\
 C_1^\theta &= \frac{\gamma_v \gamma_\ell}{1 + i\theta\varepsilon}.
 \end{aligned} \tag{95}$$

560 Hence, the frequency-independent zero-terms of asymptotic expansions of
561 the solutions ξ are the same as in Equation (51). To calculate the first-
562 order coefficients, we note that formally the coefficients (95) are equal to
563 the respective coefficients in Equations (54) evaluated at $\tau=0$ and divided
564 by $1 + i\theta\varepsilon$. This fact, in conjunction with the observation that the asymp-
565 totic expansion of the reflection coefficient (92) does not depend on τ , sig-
566 nificantly simplifies the calculations. Indeed, for the first-order coefficients
567 of asymptotic expansion for ξ we can reuse Equations (56) and (57) if we
568 put there $\tau=0$ and multiply the right-hand sides by an additional factor
569 of $1/1 + i\theta\varepsilon$. Clearly, the calculations for the first-order terms of expan-
570 sions of v and k can be carried out in a similar manner. The final result
571 is that the reflection coefficient in the asymptotic expression (92) takes on
572 the form

$$R = \frac{1 - A_{23}}{1 + A_{23}} + 2 \frac{A_{22} A_{33}}{A_{32}^{(1)}} \frac{1}{(1 + A_{23})^2} \sqrt{i - \theta\varepsilon} \sqrt{\frac{\kappa Q_b}{\eta}} \omega. \tag{96}$$

574 Thus, if $\tau\omega = O(1)$, the relaxation time and tortuosity affect both the
575 amplitude and the phase shift of the reflected signal.

576 Now, consider another extreme situation where $\theta \gg 1$, so that after the
577 division of Equation (50) by θ all terms with θ in the denominator can be
578 neglected. We obtain a quadratic equation

$$i\varepsilon(A_0\xi^2 + B_0\xi + C_0) = 0. \tag{97}$$

580 The latter implies that the frequency dependence of ξ (and, therefore, of
581 the reflection coefficient as well) vanishes. Therefore, at a very large relax-
582 ation time (or, equivalently, at a very large tortuosity), the inertial term in
583 Equation (39) makes the dissipation term on the right-hand side unimport-
584 tant. Consequently, the fluid-saturated medium acts as an elastic compos-
585 ite medium and we arrive at a classical frequency-independent elastic wave
586 reflection.

587 8. Conclusions

588 Equations of elastic wave propagation in fluid-saturated porous media can
589 be obtained from the basic principles of filtration theory. Under different
590 assumptions, these equations reduce either to Biot's poroelasticity model
591 or to the pressure diffusion equation. Comparison between our derivation
592 of poroelasticity equations and the original derivation by Biot shows that
593 the tortuosity factor entering Biot's equations is proportional to the relaxa-
594 tion time from the dynamic version of Darcy's law. This result can be used
595 to evaluate the tortuosity factor from a macroscopic flow experiment or
596 microscopic-scale flow modeling (Patzek, 2001).

597 While, due to the high attenuation, slow poroelastic waves are rarely
598 observed in practice, they significantly impact reflection-refraction pro-
599 cesses making these processes frequency-dependent. This frequency depen-
600 dence, in turn, affects both the amplitude and the phase of the reflected
601 wave.

602 The low-frequency asymptotic behavior of the reflection of a plane seis-
603 mic wave from an interface between an elastic medium and fluid-saturated
604 porous medium has been investigated. In case of moderate tortuosity, the fre-
605 quency-dependent component of the reflection coefficient is asymptotically
606 proportional to the square root of the product of the reservoir fluid mobil-
607 ity and the frequency. If the tortuosity is extremely large, the possibility of
608 which was demonstrated in Molotkov (1999), this scaling changes. In such a
609 case, the frequency-dependent component of the reflection coefficient is more
610 complicated and includes an additional factor depending on the dimension-
611 less product of the relaxation time and the frequency of the signal.

612 The obtained results suggest that the nature of the frequency-depend-
613 ence of the reflection coefficient is in viscous friction in fluid flow in the
614 pore space, rather than in the contrast between the elastic properties of the
615 overburden and reservoir rocks.

616 The obtained asymptotic reflection signal scaling has been successfully
617 applied for imaging the productivity of hydrocarbon reservoir (Korneev,
618 1998).

619 Acknowledgments

620 This work has been performed at Lawrence Berkeley National Labora-
621 tory of the U.S. Department of Energy under Contract No. DE-AC03-
622 76SF00098, the University of California at Berkeley, and at the University
623 of Houston. The authors are thankful to Dr. Steven Pride of the Lawrence
624 Berkeley National Laboratory (LBNL) for fruitful discussions and to Prof.
625 G. I. Barenblatt of the University of California at Berkeley and LBNL for
626 critical remarks. Both helped to significantly improve the presentation.

627 **References**

- 628 Alishaev, M. G.: 1974, *Proceedings of Moscow Pedagogy Institute*, pp. 166–174.
- 629 Alishaev, M. G. and Mirzadzhanzadeh, A. Kh. : 1975, On retardation phenomena in filtra-
630 tion theory (in Russian), *Neft i Gaz* **6**, 71–74.
- 631 Auriault, J.-L. and Royer, P.: 2002, Seismic waves in fractured porous media, *Geophysics*
632 **67**(1), 259–263.
- 633 Barenblatt, G. I. Entov, V. M. and Ryzhik, V. M.: 1990, *Theory of Fluid Flows Through Nat-*
634 *ural Rocks*, Kluwer Academic Publishers, Dordrecht.
- 635 Barenblatt, G. I. and Vinnichenko, A. P.: 1980, Non-equilibrium seepage of immiscible flu-
636 ids, *Adv. Mech.* **3**(3), 35–50.
- 637 Barenblatt, G. I.: 1971, Filtration of two nonmixing fluids in a homogeneous porous
638 medium, *Soviet Academy Izvestia. Mech. Gas and Fluids* **5**, 857–864.
- 639 Bear, J.: 1972, *Dynamics of Fluids in Porous Media*, Elsevier, NY.
- 640 Biot, M. A.: 1956a, Theory of propagation of elastic waves in a fluid-saturated porous solid.
641 I. Low-frequency range, *J. Acoustical Soc. of America* **28**(2), 168–178.
- 642 Biot, M. A.: 1956b, Theory of propagation of elastic waves in a fluid-saturated porous solid.
643 II. Higher frequency range, *J. Acoustical Soc. America* **28**(2), 179–191.
- 644 Biot, M. A.: 1962, Mechanics of deformation and acoustic propagation in porous media, *J.*
645 *Appl. Phys.* **33**(4), 1482–1498.
- 646 Castagna, J. P., Sun, S. and Siegfried, R. W.: 2003, *Instantaneous Spectral Analysis: Detection*
647 *of Low-Frequency Shadows Associated with Hydrocarbons*, The Leading Edge, pp. 120–
648 127.
- 649 Darcy, H.: 1856, *Les fontaines de la ville de Dijon*, Victor Dalmont, Paris.
- 650 Denneman, A. I. M., Drijkoningen, G. G., Smeulders, D. M. J. and Wapenaar, K.: 2002,
651 Reflection and transmission of waves at a fluid/porous-medium interface, *Geophysics*
652 **67**(1), 282–291.
- 653 Dinariev, O. Yu. and Nikolaev, O. V.: 1990, On relaxation processes in low-permeability
654 porous materials, *Eng. Phys. J.* **55**(1), 78–82.
- 655 Dutta, N. C. and Ode, H.: 1979, Attenuation and dispersion of compressional-waves in fluid-
656 filled rocks with partial gas saturation (White model) – Part I: Biot theory, *Geophysics*
657 **44**(11), 1777–1788.
- 658 Dutta, N. C. and Ode, H.: 1983, Seismic reflections from a gas–water contact, *Geophysics*
659 **48**(02), 148–162.
- 660 Frenkel, J.: 1944, On the theory of seismic and seismoelectric phenomena in a moist soil, *J.*
661 *Phys.* **8**(4), 230–241.
- 662 Gassmann, F.: 1951, Über die Elastizität poröser Medien, *Vierteljahrsschrift Naturforsch. Ges.*
663 *Zürich* **96**, 1–23.
- 664 Geertsma, J. and Smit, D. C.: 1961, Some aspects of elastic wave propagation in
665 fluid-saturated porous solids, *Geophysics* **26**(2), 169–181.
- 666 Goloshubin, G. M. and Bakulin, A. V.: 1998, Seismic reflectivity of a thin porous fluid-sat-
667 urated layer versus frequency, in: *Proceedings of the 68th SEG Meeting*, New Orleans,
668 pp. 976–979.
- 669 Goloshubin, G. M. and Korneev, V. A.: 2000, Seismic low-frequency effects from
670 fluid-saturated reservoir, in: *Proceedings of the SEG Meeting*, Calgary.
- 671 Hubbert, M. K.: 1940, The theory of ground-water motion, *J. Geol.* **48**, 785–943.
- 672 Hubbert, M. K.: 1956, Darcy's law and the field equations of the flow of underground fluids,
673 *Trans. AIME* **207**(7), 222–239.
- 674 Jacob, C. E. *Flow of water in elastic artesian aquifer*, Transaction AGU.
- 675 Korneev, V. A., Goloshubin, G. M., Daley, T. M. and Silin, D. B.: 2004, Seismic
676 low-frequency effects in monitoring fluid-saturated reservoirs, *Geophysics* **69**(2), 522–532.

- 677 Korneev, V. A., Silin, D. B., Goloshubin, G. M. and Vingalov, V.: 1998, Seismic imaging of
678 oil production rate, in: *Proceedings of the SEG Meeting*, Denver, CO, pp. 976–979.
- 679 Landau, L. D. and Lifschitz, E. M.: 1959, *Fluid mechanics. Series in advanced physics*, **6**,
680 Addison-Wesley, Reading, MA.
- 681 Matthews, C. S. and Russell, D. G.: 1967, Pressure buildup and flow tests in well, *Monograph*
682 *Series, Society of Petroleum Engineers*, New York.
- 683 Molokovich, Yu. M.: 1987, *Problems of Filtration Theory and Mechanics of Oil Recovery*
684 *Improvement*, Nauka, Moscow.
- 685 Molokovich, Yu. M. Neprimerov, N. N., Pikuza, B. I. and Shtanin, A. V.: 1980, *Relaxational*
686 *Filtration (in Russian)*, Kazan University, Kazan.
- 687 Molotkov, L. N.: 1999, On coefficients of pore tortuosity in an effective Biot model (in Rus-
688 sian), *Trans. St.-Petersburg branch Steklov Math. Inst.* **257**, 157–164.
- 689 Muskat, M.: 1937, *The Flow of Homogeneous Fluids in Porous Media*, McGraw-Hill.
- 690 Nikolaevskii, V. N.: 1996, *Geomechanics and Fluidodynamics: With Applications to Reservoir*
691 *Engineering*, Kluwer, Dordrecht.
- 692 Patzek, T. W.: 2001, Verification of a complete pore network simulator of drainage and imbi-
693 bition. *SPE J.* **6**(2), 144–156.
- 694 Polubarinova-Kochina, P. Y.: 1962, *Theory of Groundwater Movement*, Princeton University
695 Press, Princeton, NJ.
- 696 Pride, S. R., Harris, J. M., Johnson, D. L., Mateeva, A., Nihei, K. T., Noeack, R. L., Rec-
697 tor, J. W., Spelzler, H., Wu, R., Yamamoto, T., Berryman, J. G. and Fehler, M.: 2003,
698 *Permeability Dependence of Seismic Amplitudes*, *The Leading Edge*, 518–525.
- 699 Pride, S. R. and Berryman, J. G.: 2003a, Linear dynamics of double-porosity dual-perme-
700 ability materials. I. Governing equations and acoustic attenuation, *Phys. Rev. E* **68**(3),
701 036603.
- 702 Pride, S. R. and Berryman, J. G.: 2003b, Linear dynamics of double-porosity dual-perme-
703 ability materials. II. Fluid transport equations, *Phys. Rev. E* **68**(3), 036604.
- 704 Santos, J. E., Corbero, J. M., Ravazzoli, C. L., and Hensley, J. L., Reflection and transmis-
705 sion coefficients in fluid-saturated porous media, *J. Acoustical Soc. Amerika* **91**(1), 1911–
706 1923.
- 707 Silin, D. B. and Patzek, T. W.: 2004, On Barenblatt’s model of spontaneous countercurrent
708 imbibition, *Transport Porous Media* **54**(3), 297–322.
- 709 Terzaghi, K. and Peck, R. B.: 1948, *Soil Mechanics in Engineering Practice*, Wiley, NY.
- 710 Theis, C. V.: 1935, The relationship between the lowering of the piezometric surface and the
711 rate and duration of discharge of a well using ground-water storage, *Transaction AGU* **2**,
712 519–524.
- 713 Wang, H. F.: 2000, *Theory of Linear Poroelasticity*, Princeton Series in Geophysics, Princeton
714 University Press, Princeton, NJ.